

AnduraTex

Transform the appearance of your home and protect it from the weather with its thermal efficient benefits.



Andura

Why choose AnduraTex?

Protect and transform the appearance of your home, with advanced thermal efficiency technology and over 40 years of experience.


Heating your home uses up to 55% of the energy consumed in the home. Heat is lost through damp walls at a much higher rate than through dry walls. About 40% of the heat that is lost through wet or damp walls. Conventional exterior paints may keep your walls dry to some extent, but the innovative design and formulation of AnduraTex provides higher water resistance out lasting conventional paints, thereby ensuring dry walls for years to come. By protecting your walls with AnduraTex you could save up to 30% of this heat, simply by keeping your walls dry!



AnduraTex has been tested and assessed for Thermal Efficiency, according to test method ISO 8302:1991/BS EN 12664:2001, by The Thermal Measurement Laboratory, Salford University – Manchester, a UKAS approved testing laboratory. The thermal properties of AnduraTex provide an additional improvement in thermal efficiency of up to 12%, in addition to the 30% saving by keeping your walls dry.

All Andura products carry a manufacturer's warranty of up to 15 years. Your chosen Andura registered contractor could issue a warranty of up to 15 years at their discretion.

See T's&C's for more information

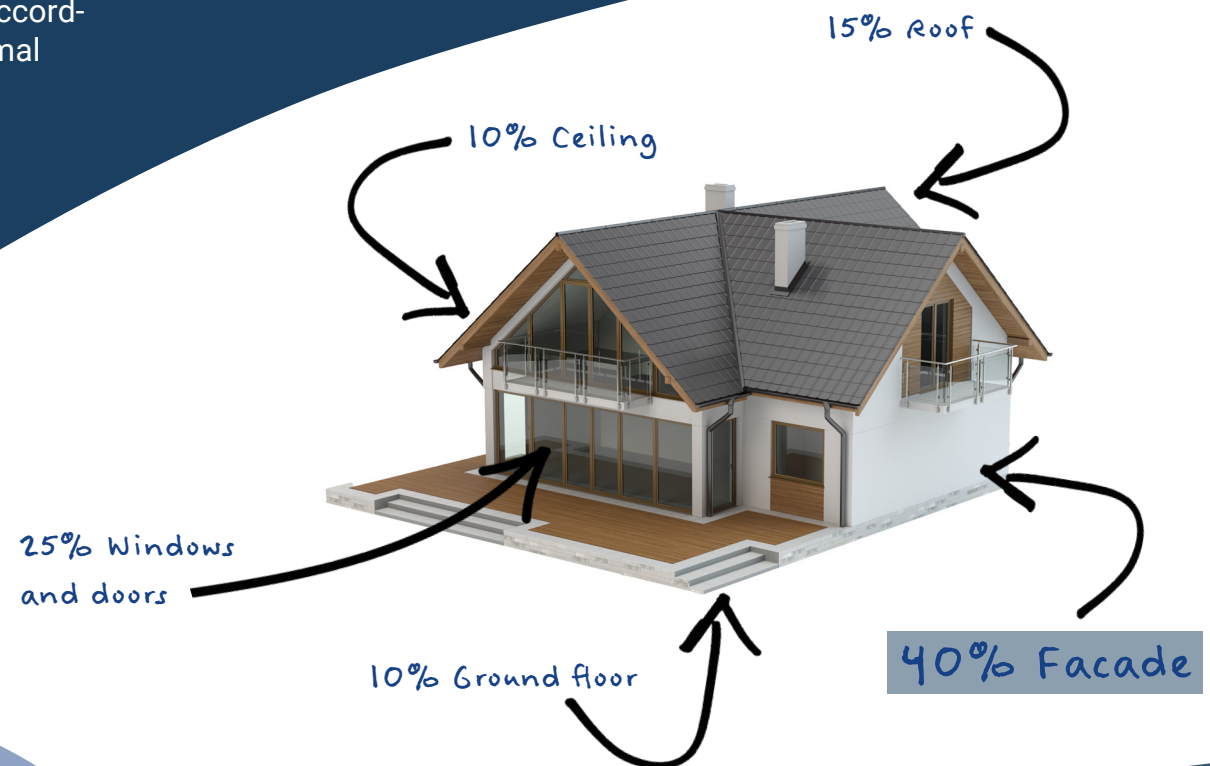

High performance benefits



Specialist
Application



Resists Acid Rain,
Chemical Attack and
Pollution



Mould Resistant



Anti Chip, Flake or
Peel



Long Lasting



Thermal Efficient



Weatherproof and
Microporous



Colour Stability



AnduraTex in action

The Andura product warranty will match the period of the registered contractor's guarantee for up to a maximum of 15 years.

T's & C's apply.

(Examples of the main processes, some of which may not apply to all installations.)

STAGE

01

Preparation

All dirt, mould, algae and loose paint is removed by power-washing, or other mechanical methods. Where appropriate, surfaces are treated with Andura Biocide. This is strongly recommended in areas where organic growth has been removed.



STAGE

02

Restore and Repair Work

The next stage is to repair all damaged and worn surfaces, reinstating missing masonry, brick or mortar with the appropriate materials. Damaged render is removed and all cracks hacked out. Great care is taken towards minimising the visibility of the repair.



STAGE

03

Masking Up

Great care is taken to protect doors, windows, paths and surrounding areas including plants, bushes and lawns. Doors and windows are masked up with tape and heavy-duty paper. Surrounding areas are protected with polythene and dust-sheets.



STAGE

04

Primer or Slushcoat

Andura's Masonry Primer and Masonry Slush are high performance base coats, designed to be used on masonry and should be applied prior to the AnduraTex final coat. This provides excellent adhesion for the top coat, preventing de-lamination and ensure the best weatherproofed results.



STAGE

05

Application

AnduraTex is applied to walls using specialist spray equipment, at a minimum rate of 1.2 litres to every square metre. The result is a textured finish that helps conceal any repair work and dries to a beautiful uniform finish.



Andura Coatings
20 Murdock Road, Bicester, Oxon OX26 4PP
01869 240374 | info@andura.co.uk | www.andura.com