Classic Smooth

Protects homes exposed to adverse weather conditions



Classic Smooth is a high performance, breathable solvent borne coating for protecting exterior masonry and concrete. Classic Smooth has been formulated for application in weather conditions where the use of water borne products may be problematic, e.g. showery weather and low drying temperatures.

The Benefits of Classic Smooth

Excellent Breathability – meaning the coating can allow high levels of moisture to escape from the wall, whilst still being highly water-resistant.

Weather Resistant – Designed to protect against the harshest of weather conditions.

Superior Durability – Over 20 years on the market proves Classic Smooth is built to last.



Highly breathable







Self-priming*




All year round application



Fast drying

*Primer may be required on highly porous substrates.



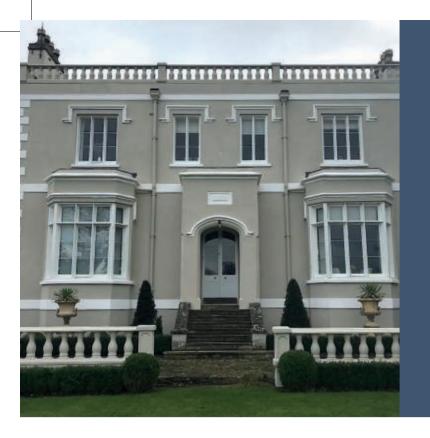

Classic Smooth The technology

Classic Smooth has been specifically formulated so that it can be applied in showery and colder conditions.



Classic Smooth is typically shower proof in under 30 minutes.



Water-resistant but breathable

Classic Smooth is the ideal solution for protecting homes more exposed to adverse weather conditions.

As per the diagram below, Classic Smooth not only creates a water-resistant barrier around your home, but it still allows water vapour to 'breathe' out, helping keep your home warm and dry.

